

CHARGE GENERATOR Easycharge

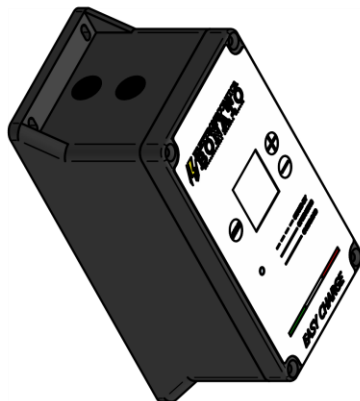
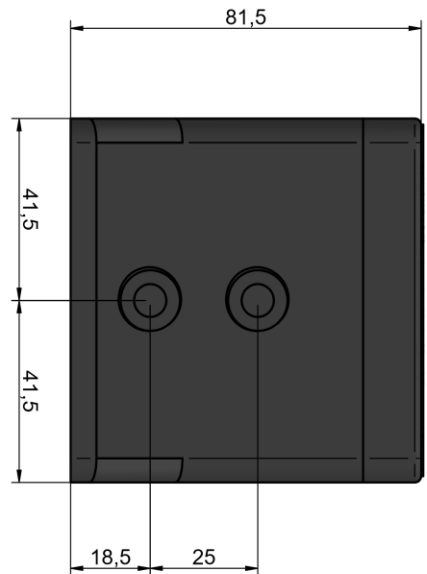






EASY CHARGE charging generator creates an adjustable high voltage between 0 to 20 kV and an also adjustable current between 0 and 1,0 mA. Its controls are very intuitive and thus easy to be used by the operator also thanks to the oled display, where you can read both voltage, instantaneous current and working mode; moreover, it can be remotely controlled by means of the remote control analogical function. It can have positive or negative charge on request and up to 2 exits.

EASYCHARGE	
Frame material	ABS
Weight	1,3 kg
Connections	2
Display	Oled
Working temperature	0 - 60 °C
Primary voltage	24V DC -1,5 A max.
Energy consumption	30 Watt max.
Secondary output	0 - 20 kV DC
Secondary current	0 - 1 mA
Polarity	Positive or negative
Features	Voltage and current control, overload indicator, Remotely controlled analogical function, controls keyboard

ELETTROMECCANICA BONATO

36010 Carré (Vicenza) ITALY - Via Rostoncello, 25/b T 0445 368178 - F 0445 364371
www.elettromeccanicabonato.it - info@elettromeccanicabonato.it



Rev.	Data	Nome		Descrizione		Finitura	
Materiali		Grazzo		Trattamento		0,3 kg	
Disegnatore	Approvato	Data	Polarizzatore				
Studio DM		29/01/2022	Scatola Easycharge completa				
<p>Il presente disegno è di proprietà della ditta Eurochimica s.p.a. e non può essere utilizzato senza permesso scritto dalla ditta Eurochimica s.p.a. pena l'azione legale.</p>							
Tolleranze Generali		Scala		Formato		Foglio	
UNI EN ISO 22768-ML		1:1		A3		1 / 1	
DIMENSIONI IN MM							
							
01		Rev.					